


TILTING WASHER EXTRACTORS



MSM100T

MSM150T

MSM200T

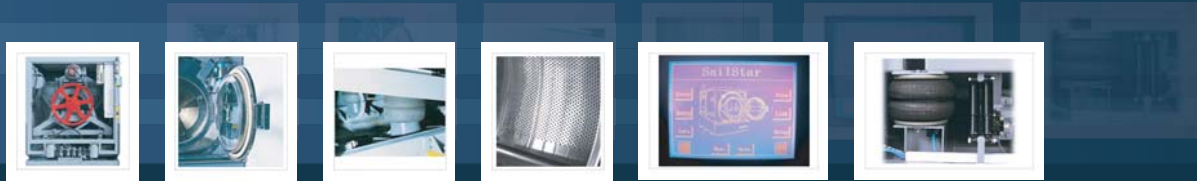

FEATURES:

- Air spring suspension system for smooth, quiet, trouble free operation
- SS304 stainless steel basket and outer drum
- Heavy duty air actuated tilting system for one-way or two-way tilt
- Exclusive Tie Bar tilting security system guarantees tilt pivot integrity
- Bearing Dry Zone design
- User friendly touch screen control
- Fully programmable computer with up to 40 cleaning programs
- Programmable water levels, water temperatures and cool-down
- Long lasting powder coated panels
- Large diameter motorized stainless steel door with air seal
- Water and steam connections are mounted on the frame base with air operated valves
- Large pneumatic drain valves with option for extra drain
- Direct steam injection heating
- Safety door interlock system
- Five flushable detergent supply compartments
- Five liquid supply connection points
- Built-in bearing lubrication system
- Optional shower spray system to soak the laundries during loading process

TECHNICAL DATA

	UNIT	MSM100T	MSM150T	MSM200T
Capacity	KG	100	150	200
DRUM				
Volume	L	1076	1459	2232
Diameter	mm	1320	1320	1625
Depth	mm	750	1030	1030
DOOR				
Door Opening	mm	850	850	1016
Door to Floor	mm	690	690	880
SPEED (ADJUSTABLE)				
Wash	RPM	32	32	28
Distribution	RPM	64	64	56
Low Extract	RPM	330	330	280
High Extract	RPM	658	658	575
POWER				
Motor	kW	11	15	22
Inverter	kW	15	22	37
G-FORCE				
Low Extract	G	76	76	76
High Extract	G	320	320	300
CONNECTIONS				
Water Inlet	DN	40	40	50
Steam Inlet	DN	25	40	40
Drain Connection	DN	150	150	200
Compressed Air	mm	14	14	14
TILTING ANGLE				
Loading	deg.	14	14	14
Unloading	deg.	14	14	14
MACHINE DIMENSIONS				
Height	mm	2102	2102	2451
Height (Tilt Position)	mm	2465	2578	2930
Width	mm	2032	2032	2337
Depth	mm	2222	2692	2825
MACHINE WEIGHT				
Net Weight	kg	4000	4319	6192
CONTROLS				
Micro-computer Control User Interface		Yes Touch-Screen LCD	Yes Touch-screen LCD	Yes Touch-screen LCD
DETERGENT SUPPLY				
Dry Supply Compartments		5	5	5
Liquid Supply Injection Points		5	5	5
Programmable Signals		8	8	8
CONSUMPTION *				
Steam	kg / hr	32	65	85
Electricity	kW / hr	3.83	4.5	6
Water	L / hr	1430	1830	2280
Air	L / hr	200	250	280
OPTIONS				
Two-way Tilt		+	+	+
Water Reuse Connection		+	+	+
Shower Spray for Loading		+	+	+

+: Available on request - : Not applicable

WE RESERVE THE RIGHT TO UPDATE THE ABOVE SPECIFICATIONS WITHOUT NOTICE
* May vary depend on conditions

YOUR LOCAL SAILSTAR DISTRIBUTOR

© Shanghai Sailstar Machinery Group CO., Ltd.

SAILSTAR

Address: 1 Fengpu Ave. Fengpu Industrial Zone,
Shanghai China 201400.

Phone : 86-21-67100168 Fax : 86-21-67100337
Email : info@sailstar.com.cn URL : www.sailstar.com.cn

SAILSTAR USA OFFICE

Address: 2307-A Distribution Center Drive, Charlotte, NC 28269, USA.

Phone: 00-1-704-393-2452

Fax: 00-1-704-393-3257