

Y150 SEAL

HIGHLIGHTS

- Print, Cut & Seal in One Step
- 11 Colors of Thermo-Seal® Tape
- User Friendly
- Easy Maintenance
- No Solvents Required



Speeds marking in... helps prevent sorting errors! Reduces sorting labor.

Color coded tags make sorting shirts a simple task. Shirts can be sorted into movable transporters or numbered rail clips right off the folder or finishing unit, reducing the amount of labor required. Labels print clearly, adhere firmly, and yet peel off easily. Label length adjusts automatically to match number of characters.

Store... day... week... lot... bundle

The Thermo-Seal® tag gives positive lot control to prevent costly, time consuming mix-ups and lost garments. Large, clearly printed letters and numerals make sorting easier. Four to twelve characters are set in seconds for any code. The tape, available in eleven solid colors, allows you to combine the color code with your printed code to make sorting even easier and faster.

Thermo-Seal® taperolls

This tape is specifically made for all Thermo-Seal® temporary marking machines. The eleven colors are orange, yellow, red, gray, lavender, white, green, pink, blue, gold and tan. Adheres to cottons, poly/cotton blends, loose weave polyester and wools.



Thermo-Flags® tags

Where Thermo-Seal® tape can't be applied directly to the garment, apply tape to a Thermo-Flags® tag and staple or pin to garment. White only.



Ink ribbon cartridge #RC2410-15

This cartridge features black indelible ink ribbon that prints sharply and cleanly on Thermo-Seal® taperolls. Print stays clear and legible through laundering, dry cleaning and finishing operations. The ink cartridge is very simple to snap into place.



| SPECIFICATIONS | |
|---|--|
| Electronic Requirements: | 6.3 amps @ 115 volts or 3.1 amps @ 230 volts |
| Operating Air Pressure: | 60 PSI or 4.0 bars |
| Machine Height x Width x Depth: | 15.3" x 21.9" x 17.1" (389 mm x 556.5 mm x 432.5 mm) |
| Machine Weight: | 40.7 lbs. (18.5 kg) |
| CE Certified | |
| Menu offers 3 languages: English, Dutch and Spanish | |


Thermopatch Australia Pty Ltd
Thermopatch Canada Inc
Thermopatch European Headquarters
Kannegiesser UK
Thermopatch Corporate Headquarters

Australia
Canada
Netherlands
United Kingdom
USA

tel. +61 395325722
tel. +1 519 748-5027
tel. +31 36 549 11 11
tel. +44 1539 722122
tel. +1 315 446-8110

fax +386 2 80 55 232
fax +1 519 748-1543
fax +31 36 532 03 98
fax +44 1539 721000
fax +1 315 445-8046

e-mail marktatchausti@bigpond.com.au
e-mail broussel@thermopatch.com
e-mail sales@thermopatch.nl
e-mail thermopatch@kannegiesser.com
e-mail sales@thermopatch.com

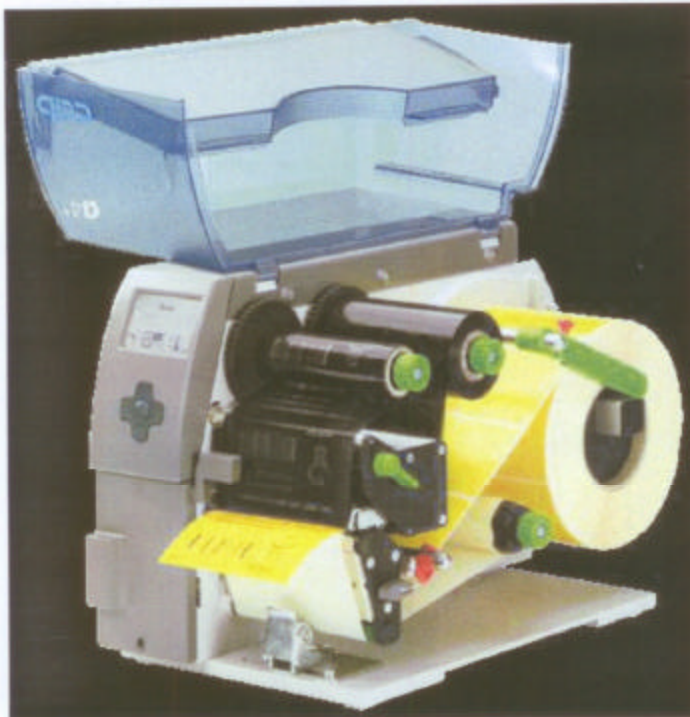

With Hytex labels



Using the thermal transfer technology too, the Y-940 machine offers you the complete package of printing, cutting and sealing. A separate leaflet is available.

| | |
|--------------------|--|
| Printing method | Thermal Transfer |
| Resolution | 203 DPI (300 DPI optional) |
| Printing speed | 250mm/sec (8 inch) |
| Printing width | 25 -90 mm |
| Height | 274 mm |
| Width | 242 mm |
| Depth | 446 mm |
| Weight | 9 KG |
| Label sensor | See through / reflective |
| Energy consumption | Max 250 W |
| Power supply | 110 -240 V 50 / 60 Hz auto sensing |
| Safety | CE |
| Processor | 32 bit 64 Mhz |
| RAM | 8 Mb |
| ROM | 2 Mb flash |
| Memory card | Compact Flash Type 1 |
| Display | LCD Graphic display |
| Interfaces | Serial, USB Ethernet 10/100, Base T |
| Cutter | Optional Full cut or Perforated cut |
| Drivers | CAB driver for Windows® 98, ME, 2000, 2003, XP and NT 4.x SP6a or Thermopatch Seagull driver for Windows® 2000, NT 4.x SP6a and XP |
| Manuals | Short Manual on CD in Bulgarian, Czech, Danish, English, Finnish, French, German, Hungarian, Italian, Dutch, Norwegian, Polish, Portuguese, Russian, Spanish and Turkish. Full manual available in English and German. Programming manual in English. Spare parts multilingual English/ German. |

| | | | | |
|------------------------------------|-------------|-----------------------|----------------------|--------------------------------------|
| Thermopatch Australia Pty Ltd | Australia | tel. +61 395325722 | fax +386 2 80 55 232 | e-mail marktpatchaust@bigpond.com.au |
| Thermopatch Canada Inc | Canada | tel. +1 519 748-5027 | fax +1 519 748-1543 | e-mail brouseil@thermopatch.com |
| Thermopatch European Headquarters | Netherlands | tel. +31 36 549 11 11 | fax +31 36 532 03 98 | e-mail sales@thermopatch.nl |
| Ducker Ltd | United | tel. +44 1539 722122 | fax +44 1539 721000 | e-mail thermopatch@ducker.co.uk |
| Thermopatch Corporate Headquarters | USA | tel. +1 315 445-8110 | fax +1 315 445-8046 | e-mail sales@thermopatch.com |
| 10-08-2006 | | | | www.thermopatch.com |